

once[®] ANIMAL LIGHTING

NatureDynamics FCI ADAMS 00 0-10V




- *User friendly farm computer interface*
- *Easily controlled via remote computer 0-10VDC analogue-signal*
- *Surface mount bracket and DIN rail clip*

Invest in the quality of your lighting system

The FCI ADAMS 00 0-10V is an electronic interface that allows the farm computer to control the intensity of the NatureDynamics lamps. It can accept 0-10VDC analog input to alter lamp illumination.

Dimensions

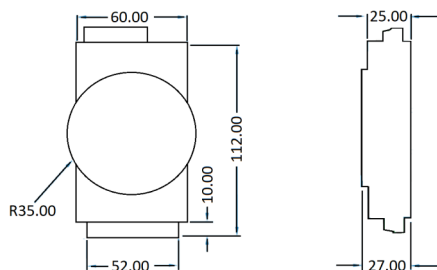

Visit our website for more information ruby360.ca

Specifications and Ordering

FCI ADAMS 00 0-10V Specifications

Nominal power	2.7W @ 24VDC
Input voltage	10 ~ 30 VDC
Input frequency	-
Power input	20mA @ 0-10VDC
Power output	-
Power consumption tolerance	+/- 10%
Power factor	-
Inrush current	-
Inrush time	-
Electrical protection	2,000 VDC Isolation, TVS/EDS, power reversal
Control interface	External computer signal 0-10VDC, 8 analog I/O channels / 2 digital I/O channels
Warranty period	3 years
HS code	90328900
Country of origin	China

Operating and Mechanical Specifications

Operating temperature	-20°C to 70°C / 4°F to 158°F
Maximum devices	-
Connection	Screw terminals
Diameter	-
Height	27mm/1.06in
Length	112mm/4.41in
Width	70mm/2.75in
Mount	Wall mount bracket, DIN rail clip
Housing material	Plastic
Color	Blue
Product weight per piece	0.183 kg/0.403 Lbs pc.

Safety and Certifications

Alarms	Screw terminal connection for external alarm
CE mark	Yes
RoHS compliant	Yes—RoHS/Reach
FCC	Yes
Flammability mark	-
IEC protection class	-
IK impact rating	-
IP code	-

Ordering Information

Description	SKU	Order code
FCI ADAMS 00 0-10V	1000000915	9290 021 00629

Your official Once dealer

Ruby 360

INTEGRATED AGRICULTURAL SOLUTIONS

1-888-218-7829 sales@ruby360.ca

40 Woodstock St. N., Tavistock, ON N0B 2R0

ruby360.ca

once
by 

© 2021 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Revised 2/2021 Data subject to change